




- Bracket is not designed for a specific application and will fit a variety of rear ends and chassis.
- Grinding of Q.C. side bell reinforcing ribs may be required to mount bracket.
- Longer Q.C. center section "through bolts" may be needed to properly mount bracket.
- It is recommended to fabricate stiffener braces once brackets are fitted to rear end.

UPPER LINK BRACKET

TECH INFO

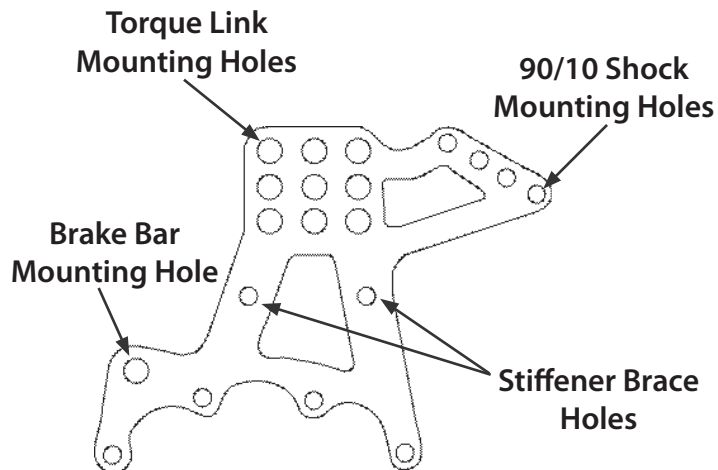

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com

Form 1093

Page 1 of 1


Rev. 103009



- Bracket is not designed for a specific application and will fit a variety of rear ends and chassis.
- Grinding of Q.C. side bell reinforcing ribs may be required to mount bracket.
- Longer Q.C. center section "through bolts" may be needed to properly mount bracket.
- It is recommended to fabricate stiffener braces once brackets are fitted to rear end.

TORQUE LINK BRACKET

TECH INFO

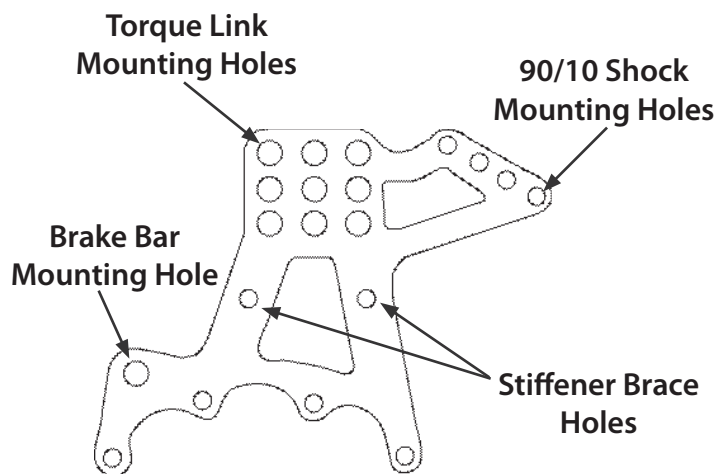

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com

Form 1093

Page 1 of 1

Rev. 103009